


McGOVERN

Contract Lifting & Crane Hire

www.mcgovcranehire.co.uk

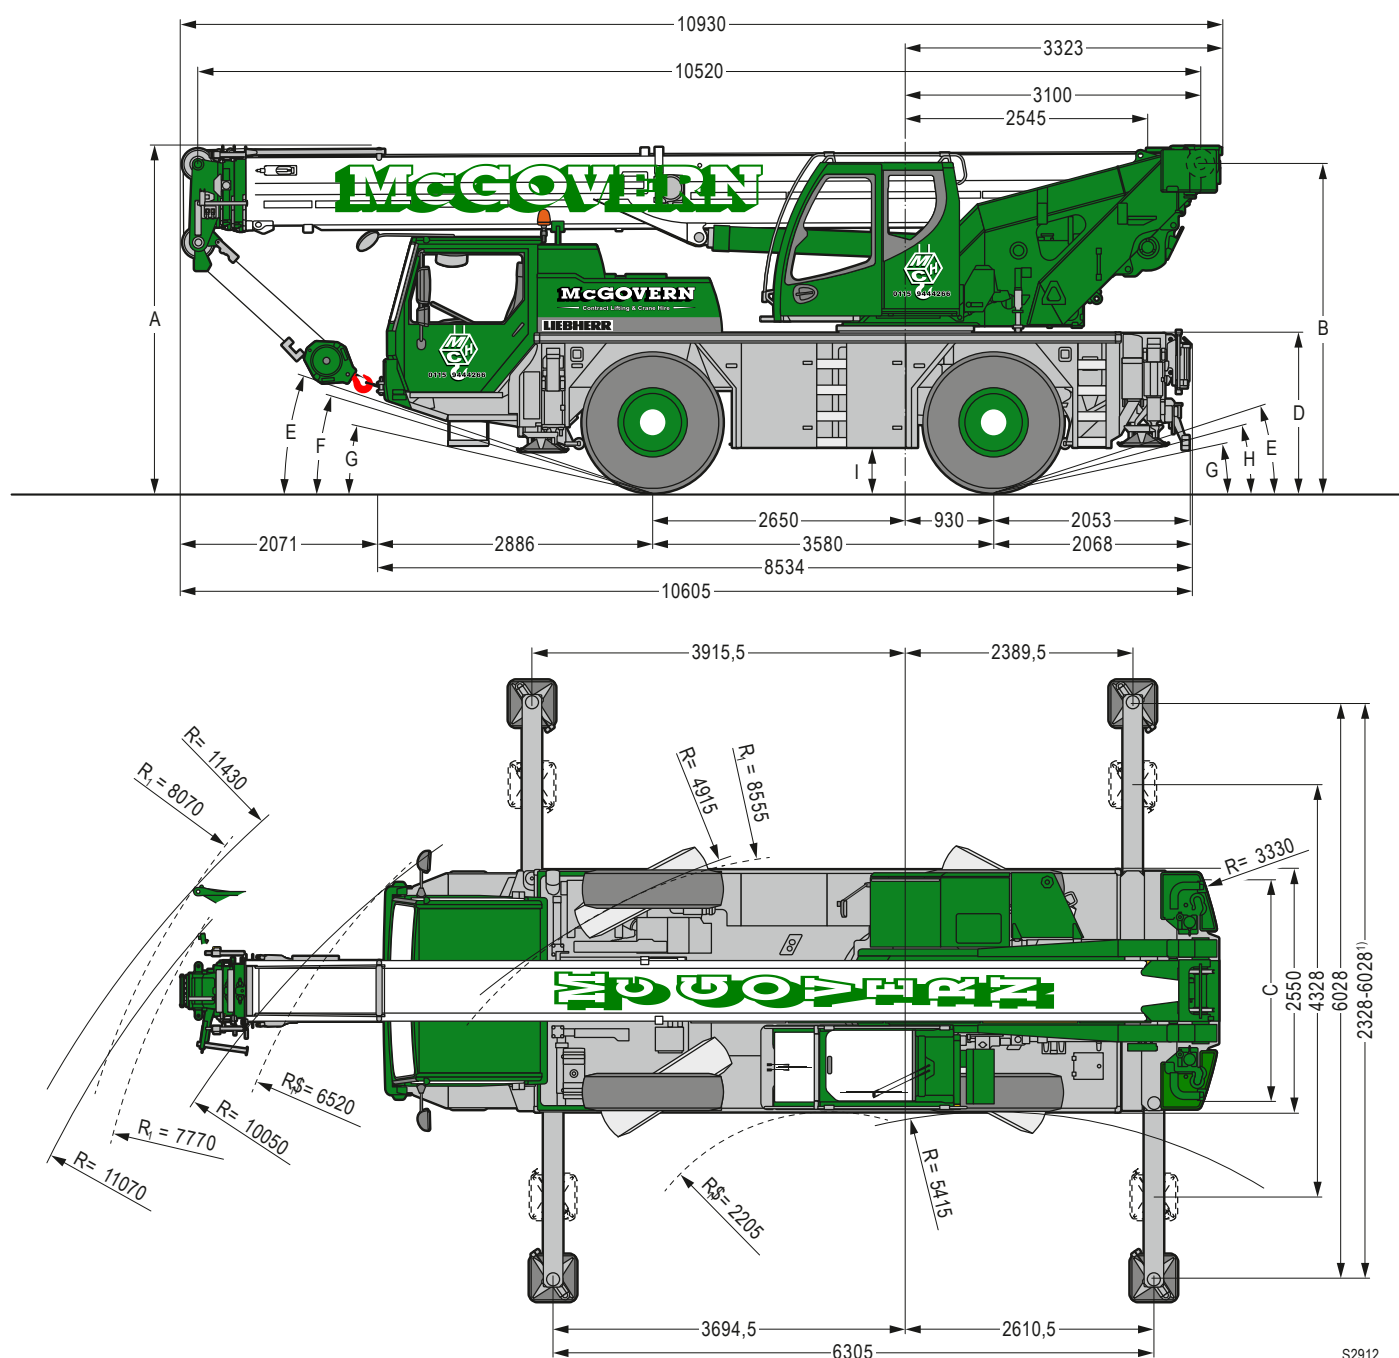

S2912

R₁ = Allradlenkung · All-wheel steering · Direction toutes roues · Tutti gli assi sterzanti · Dirección todos los ejes · ἵσάριθρόαξιάλε · ἐπὶ εἰσάξιάλε
¹⁾ nur mit VarioBase® · only with VarioBase® · seulement avec VarioBase® · solo con VarioBase® · sólo con VarioBase® · только с VarioBase®

Dimensions/mm

	A	A 100 mm*	B	C	D	E	F	G	H	I
385/95 R 25 (14.00 R 25)	3550	3450	3369	2160	1598	18°	16°	11°	14°	375
445/95 R 25 (16.00 R 25)	3600	3500	3419	2100	1648	19°	17°	12°	15°	425

* abgesenkt · lowered · abaissé · abbassato · suspensión abajo · αἰσθητὴ ἱλάσσασθαι

Weights



Hakenflasche/Hook block/Moufles à crochet/Bozzello/Pastecas/Êôpêiâûã ññããñê

			
34,9 t	5	11	265 kg
22,8 t	3	7	165 kg
10,1 t	1	3	145 kg
3,4 t	—	1	75 kg

Working speeds

 **Kranfahrgestell/ Crane carrier/ Châssis porteur/ Autotelaio/ Chasis/ Øaññè**

	 min. lėi.	 max. lėi.	 %
385/95 R 25 (14.00 R 25)	0 – 3,7	80	> 60 %
445/95 R 25 (16.00 R 25)	0 – 4,1	85	60 %

Theoretisches Steigvermögen/Theoretical gradeability/Aptitude théorique en pente/Inclinación teórica/Capacidad de traslación teórica en pendiente/теоретическая способность подъема



6 / R2





Crane superstructure/


	 m/min für einfachen Strang / single line 0 – 120 m/min au brin simple / per tiro diretto / a tiro directo i/ièi iòèiáííèðàòíèçàíñièèä	 13 mm	 165 m	 34 kN
	0 – 2,4 min ⁻¹ îá/ièi			
	ca. 45 s bis 81° Auslegerstellung / approx. 45 seconds to reach 81° boom angle env. 45 s jusqu'à 81° / circa 45 secondi fino ad un'angolazione del braccio di 81° aprox.45 segundos hasta 81° de inclinación de pluma / îè. 45 ñäè.äi âùñòàäèäíèý ñòðäèù ià 81°			
	ca. 75 s für Auslegerlänge 10,5 m – 35 m / approx. 75 seconds for boom extension from 10.5 m – 35 m env. 75 s pour passer de 10,5 m – 35 m / circa 75 secondi per passare dalla lunghezza del braccio di 10,5 m – 35 m aprox.75 segundos para telescoparla pluma de 10,5 m – 35 m / îè. 75 ñäè.äi âùäàèèäèäíèý iò10,5 i äi 35 i			

Counterweight

Counterweight Version 1

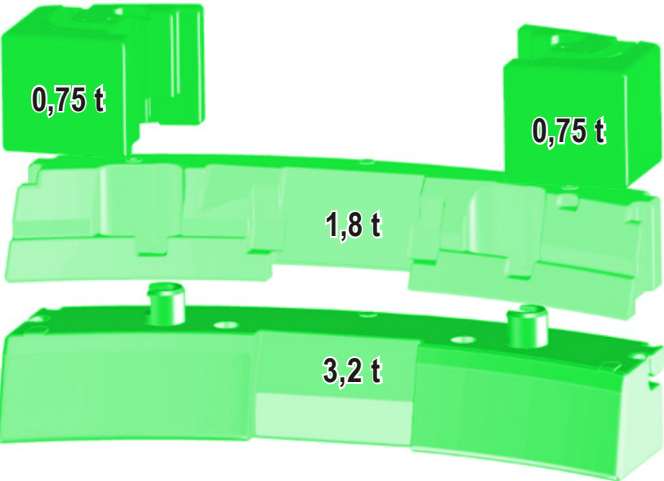

Counterweight Version 2

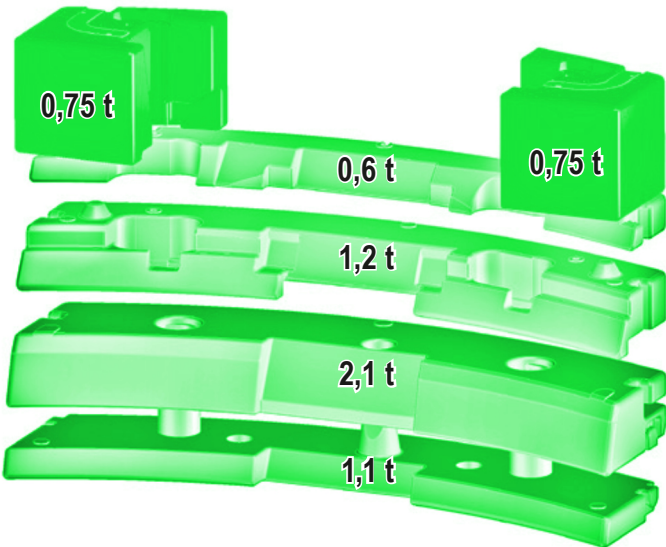


Technisch transportierbar - Technisch transportierbar - Technisch transportierbar - Technisch transportierbar - Technisch transportierbar

Axle


	1	2	
			
t	12	12	24 ¹⁾

* mit 1,5 t Ballast · with 1.5 t counterweight · avec contrepoids 1,5 t · con contrapesos di 1,5 t · con 1,5 t de contrapeso · հիմնով 1,5 օ

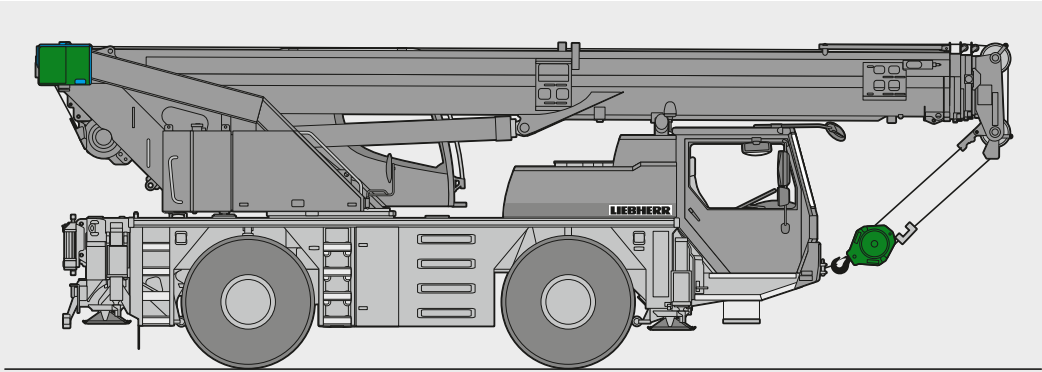


S3003.01

T

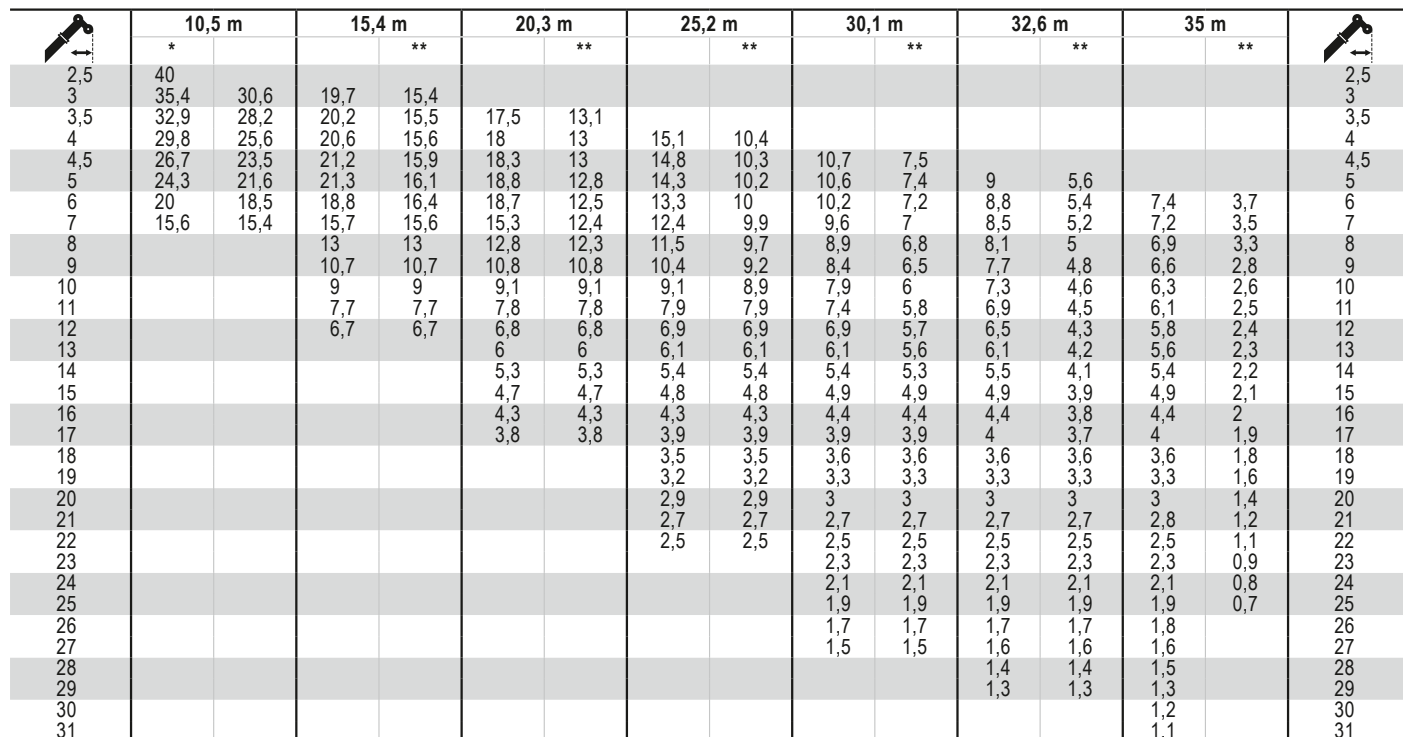

t 196 00226 00 000 / 00009 00 000

** teleskopierbare Lasten · telescopic loads · capacités de levage en télescopage · portate del braccio in estensione · cargas telescópicas · 0ăăăñîîèđîăîèă ïă îăăđóóêîè

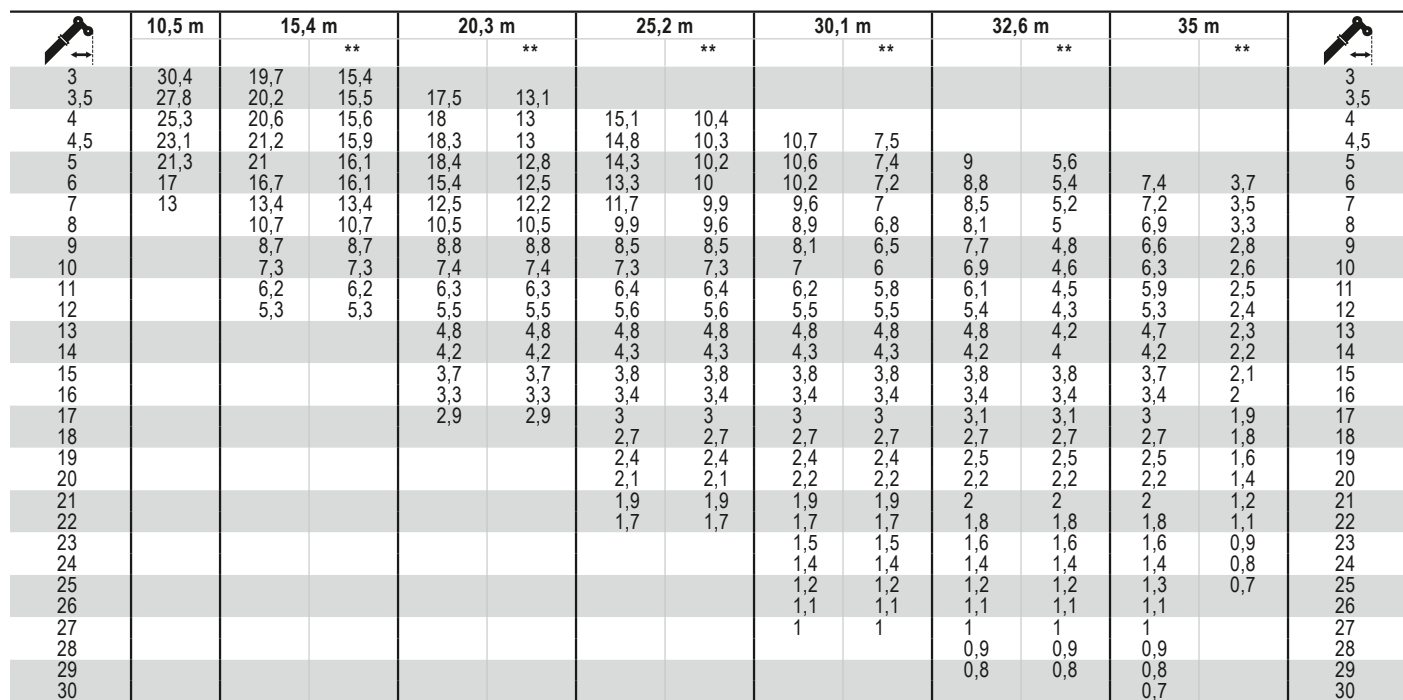

*** teleskopierbare Lasten - telescopic loads - capacités de levage en télescope - portate del braccio in estensione - cargas telescópicas - ὀρεσθητέα ἄλλα ἐὰν τὰ ἱαδόμενα εἰς mit 4teiligem Zusatzballast - with 4-parted additional counterweight - avec contrepoids additionnel en quatre éléments - con zavora supplementare in quattro parti con contrapeso adicional compuesto de cuatro piezas - с дополнительным балластом состоящим из 4-х частей

t_196_00154_00_000